


axl Everfly

6S 12000mAh

User Manual

V1.0 | 26.01

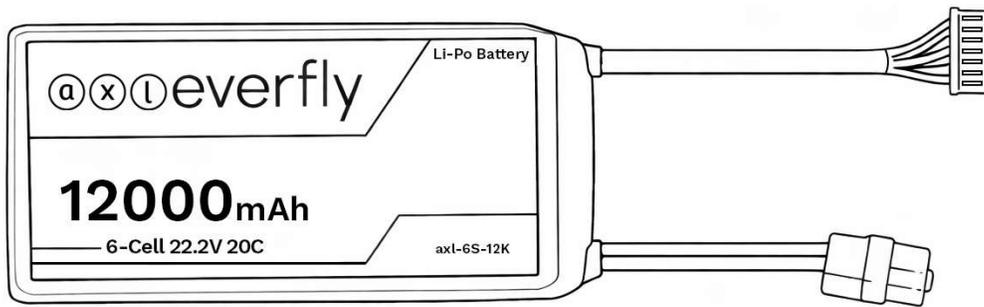



This document is the intellectual property of axldrone India Pvt. Ltd. and is protected under applicable copyright laws. Unless expressly authorized by axldrone, you may not reproduce, distribute, transmit, or sell this document or any portion of its contents in any form.

This document is intended solely for the purpose of guiding users in the proper operation of axldrone products. It must not be used for any other purposes, commercial or otherwise, without prior written consent from axldrone India Pvt. Ltd.

Table of Contents

Introduction	1
What Exactly Is a 6S LiPo Battery?	2
Understanding the Voltage	2
Applications of 6S LiPo Batteries.....	2
Charging Your 6S LiPo axl everfly Battery: Critical Safety Guidelines.....	3
Selecting the Correct Charger.....	3
Safe Charging Procedure.....	3
Connecting Type & Accessories	4
Technical Specifications	5
Storage and Handling of axl everfly 6S LiPo Battery	5
Spotting and Dealing with Damage	6
How Long Should My 6S LiPo Battery Last?	6

Introduction

axl everfly 12000mAh 6S LiPo battery is engineered to meet the demands of high-performance drones, advanced RC vehicles, and robotics. Combining high voltage output, substantial current capacity, and a lightweight form factor, this battery is designed to deliver reliable, consistent power while maintaining optimal efficiency and maneuverability for demanding applications.

Understanding the operational characteristics, charging procedures, and maintenance requirements of the axl everfly battery is critical to maximizing performance, ensuring safety, and extending its lifespan. Improper handling or charging can compromise efficiency, reduce longevity, and create safety risks. This guide will walk you through everything a beginner needs to know.

What Exactly Is a 6S LiPo Battery?

“6S” Means Six Cells in Series: A 6S LiPo battery consists of six individual cells connected end-to-end (in series) within a single battery package. Each cell contributes to the total voltage of the battery.

Voltage Overview: Each LiPo cell has a nominal voltage of approximately 3.7 volts (V). When six cells are connected in series, the voltages add together, producing a nominal voltage of 22.2 V (6×3.7 V).

Why Higher Voltage Matters: Higher voltage allows the battery to deliver more power to motors, enabling faster acceleration, higher top speeds, and improved overall performance in drones and RC vehicles. Compared to lower-voltage configurations, such as 3S or 4S batteries, a 6S LiPo battery provides a significant boost in energy delivery and efficiency.

Understanding the Voltage

- Fully Charged: 25.2 V (Each cell is at 4.2 V)
- Nominal Voltage: 22.2 V (Each cell is at 3.7 V)
- Storage Voltage: 22.8 V (Each cell is around 3.8 V) - The safest voltage for storing your battery when not in use for more than a day or two.
- Danger Zone / Minimum Safe Voltage: This is the lowest voltage you should let your battery reach per cell 3.2V.

Applications of 6S LiPo Batteries

The high voltage and power density of a 6S LiPo battery make it well-suited for a variety of high-performance RC and UAV applications, including:

- Larger Drones: Professional aerial platforms that demand extended flight performance and higher thrust.
- High-Performance RC Cars and Trucks: Particularly suitable for buggies and trucks, where high voltage provides increased speed, torque, and acceleration.
- RC vehicles and robotics: Higher voltage allows for faster speeds, improving overall performance.

Charging Your 6S LiPo axl everfly Battery: Critical Safety Guidelines

Warning: Improper charging is the leading cause of LiPo battery incidents. Adhering to safe charging procedures is essential for both personal safety and battery longevity.

Selecting the Correct Charger

Use a balance charger specifically designed for LiPo batteries and rated for at least 6 cells (6S).

Choose reputable brands to ensure reliability and safety. Avoid low-quality or unverified chargers.

Verify that your charger's power supply can provide sufficient wattage for your desired charge rate: $(\text{Volts} \times \text{Amps} = \text{Watts})$.

Smart Chargers: Modern chargers can detect battery type and set appropriate charging parameters. Despite automation, understanding basic charging principles and verifying settings remains essential.

Safe Charging Procedure

Follow these steps every time to ensure safe operation:

1. **Cool Down First:** Allow the battery to reach ambient temperature before charging. Charging a hot battery can increase risk and degrade lifespan.
2. **Safe Location:** Charge on a fire-resistant surface (concrete or metal), away from flammable materials such as paper, curtains, or wood.
3. **Connect Balance Lead First:** Insert the small balance connector JST-XH into the correct 6S port on your charger before connecting the main power lead.
4. **Connect Main Power Lead:** Connect the main battery connector XT90 to the charger.
5. **Configure Charger Settings**
6. **Start Charging & Supervise:** Begin the charging cycle. Never leave a LiPo battery unattended. Monitor periodically; the battery should only become slightly warm. If it becomes hot or begins puffing, immediately stop charging.
7. **Completion:** When the charger signals the end of the cycle, disconnect the main lead first, followed by the balance lead.

Connecting Type & Accessories

The axl Everfly 6S LiPo battery comes with standard connectors to ensure safe and reliable operation with compatible systems.

Included Accessories:

1. Power Cable

Type: XT90 Female
 Wire Gauge: 10 AWG
 Length: 140 mm

Purpose: Supplies high-current power from the battery to your power distribution board.

2. Balance Cable

Type: JST-XH Female
 Wire Gauge: 22 AWG
 Length: 140 mm

Purpose: Monitors and balances the voltage of individual cells during charging to ensure safe and uniform charge cycles.



Balance Cable

Power Cable

User Notes:

- Always connect the balance cable first when charging.
- Connect the main power cable only after the balance lead is securely attached.
- Inspect connectors regularly for damage, dirt, or corrosion before each use.

Technical Specifications

Specification	Details
Capacity	12000 mAh
Voltage	22.2 V (6S)
Discharge Rate	20C
Configuration	6S1P
Connector Type	XT90S and JST-XH
Dimensions (L×W×H)	177mm x 77mm x 50mm
Weight	1.4 kg

Storage and Handling of axl everfly 6S LiPo Battery

Storage Charge: If you won't use your 6s LiPo battery for more than 2-3 days, use your charger's "Storage" function. This brings each cell to ~3.8-3.85V (totally 22.8~23.1v) , the ideal voltage for long-term health. Never store LiPos fully charged or fully empty!

Storage Location: Store batteries in a cool, dry place (around room temperature is fine). Keep them inside a LiPo bag, away from flammable materials.

Inspect Regularly: Before and after each use, check for:

- Puffing/Swelling: Any puffiness means the battery is damaged. Retire it safely.
- Physical Damage: Dents, deep scratches, torn wrapping, damaged wires/connectors.
- Heat: Excessive heat after use can indicate a problem or that the battery is working too hard (C-rating might be too low).

Handling: Don't drop them. Never let loose metal objects touch the connectors (risk of short circuit!).

Spotting and Dealing with Damage

Swelling/Puffing: If the battery swells up (puffs), it's internally damaged, likely due to over-discharge, over-charging, overheating, or physical impact. Do NOT attempt to charge or use a puffed LiPo. It's a fire hazard.

Over-Discharge: If you accidentally run a battery below the recommended minimum voltage per cell (e.g., below 3.2 V), it might be permanently damaged. It may not hold a full charge, have reduced capacity, or be unsafe to use. Some chargers might refuse to charge a severely over-discharged pack.

Disposal: Damaged or dead LiPos need careful disposal.

Discharge them FULLY

Take them to a battery recycling center or hazardous waste facility. Do NOT put them in regular trash.

How Long Should My 6S LiPo Battery Last?

Cycle Life: A well-cared-for LiPo might last anywhere from 150 to 300+ charge/discharge cycles. Some premium packs might do better, but real-world results vary greatly.

Factors Affecting Lifespan:

- Heat: Avoiding excessive heat during use, charging, and storage is key. Never charge a hot battery.
- Over-Discharge: Repeatedly running below the recommended minimum voltage/cell shortens life significantly.
- Storage: Storing fully charged, or empty degrades them faster. Always use storage voltage!
- Charge Rate: Consistently charging above 1C (or the manufacturer's recommendation) can reduce lifespan. Sticking to 0.5C is generally best for longevity.
- Physical Damage: Impacts shorten life.

Visit Our website



Feel free to connect



*Kakkanad, Ernakulam,
Kerala, India – 682030
P : +91 484 299 3399,
+91 949 771 7654
E : info@axldrone.com*

*C5 UL Cyber Park,
Special Economic Zone
Calicut, India – 673016
P : +91 9645 426 414
E : info@axldrone.com*

*1441 Broadway,
#5, New York, NY 10018
P : +(646) 260-6311
E : info@axldrone.com*